RHINOGUARD™

A brand of **DRIVER** INDUSTRIAL SAFETY

COMING SOON
ADA CABLE PROTECTORS

RGADA513A-R/BLU, RGADA513A-B/BLU, RGADA513A-R/B, RGADA513A-B/B

NEW IN ★ 2024 ★ NOVEMBER

Cable Protectors

COMING SOON

RhinoGuard™ ADA Cable Protector

Models:

RGADA513A-R/BLU (Red Lid/Blue Base)
RGADA513A-B/BLU (Black Lid/Blue Base)
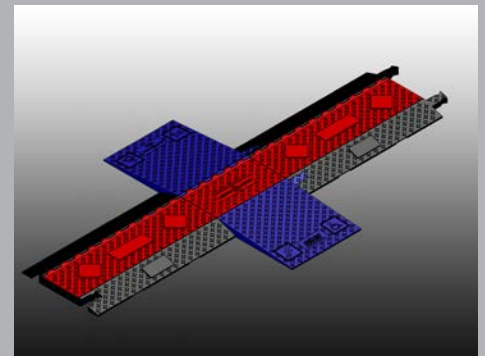RGADA513A-R/B (Red Lid/Black Base)
RGADA513A-B/B (Black Lid/Black Base)
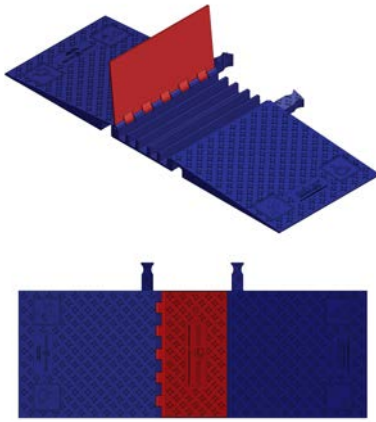
HIGHLIGHTS

■ **Compliant with ADA/DDA Standards (Americans with Disabilities Act/Disability Discrimination Act):** The specification of 12" of horizontal distance for every 1" of vertical rise ensures a gradual slope, facilitating wheelchair accessibility. This feature is also beneficial for pushing carts and maneuvering low-clearance equipment across different environments.

■ **Superior Reaction Injection Molding (RIM):** Produces lighter-weight parts with a higher strength-to-weight ratio. Up to 25% lighter than other cast models on the market.

■ **Consistent, High-Quality Parts:** Easier to connect/disconnect compared to cast molding. Premium aesthetic appearance with no sharp edges, making it safer to handle.

■ **Compatibility and Material Advantages:** Made with the most popular connector, compatible with other brands. Polyurethane material offers higher load capacity/impact absorption, non-conductivity, lighter weight, and UV stabilized/weather resistance.

■ **Functional Design:** Snap on/off lid for easy field lid swapping, no fiberglass rods required. Protects cables/hoses up to 1.3" outside diameter (ideal for 4/0 cable), with a center channel accommodating up to 1.6" outside diameter (ideal for #2 AWG 5-wire banded sets).

■ **Safety and Performance Features:** Diamond tread pattern designed for improved traction. Protects cables and hoses effectively.

■ **Customization Options:** Custom colors and logos are available, allowing for personalization.

SPECIFICATIONS

Taking orders now!

Ready to ship early November 2024!

RhinoGuard™ Cable Protector System

Model Numbers	RGADA513A-R/BLU, RGADA513A-B/BLU, RGADA513A-R/B, RGADA513A-B/B
Load Capacity Per Axle (lbs)	30,000
Load Capacity Per Tire (lbs)	15,000
Length (Inches)	18.0
Width (Inches)	50.0
Height (Inches)	2.0
Weight (lbs)	21.0
Max Cable Outside Diameter (Inches)	1.32, 1.6 (Center Channel)
Number of Channels	5